
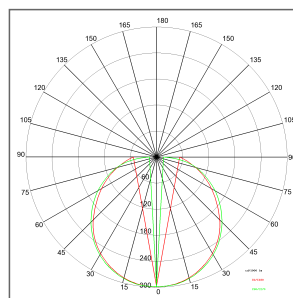


JUPITER XS
COD: 62140-LBC

Use:
inside, led
Installation:
Wall/Ceiling mounted
Body/structure:
Steel body
Coating:
Epoxy powder coating for inside use
Colour:
White
Glass/diffuser:
Polycarbonate opal diffuser
Cable gland:
Silicon rubber cable gland
Control gear:
LED driver

Voltage: 220-240V 50/60Hz
Beam angle: Simmetric flood beam
Insulation class: Insulation class 1
IP rating: 40
Glow wire: [650 °C]
IK rating: 7
Lamp included: Yes
Kind of led: SMD LED
Lamp wattage: 12 W
Lamp luminous flux: 860 lm
Colour temperature: 3000
CRI: 80

Review board: 25-06-2014

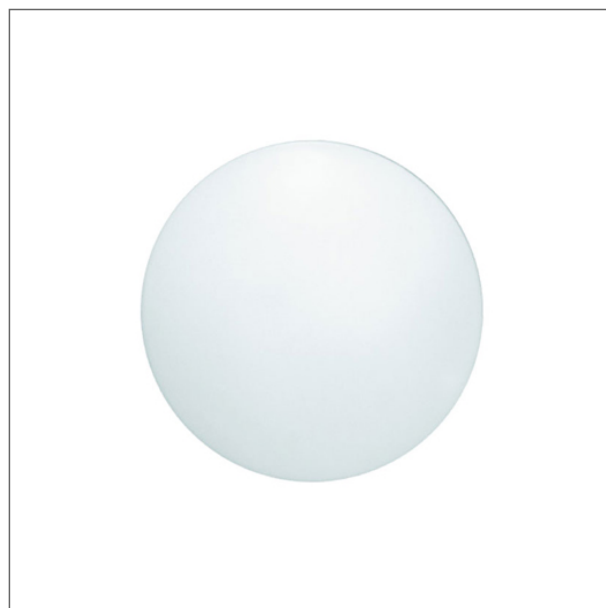

EnaxEmin	180°	90°	0 m
65 / 41	Arroz: NAN x NAN	90°	2 m
17 / 10	Arroz: NAN x NAN		4 m
8 / 5	Arroz: NAN x NAN		6 m
5 / 3	Arroz: NAN x NAN		8 m
3 / 2	Arroz: NAN x NAN		10 m
2 / 2	Arroz: NAN x NAN		12 m

60-Cri80, 50° x 50° 036-C270, 61° x 61°


Lamp: 1 x 13 +/- 12 W 860 lm




IK 7

IP 40

A

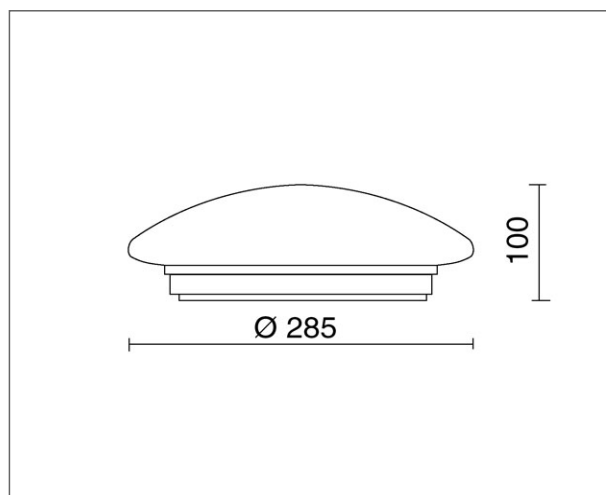

JUPITER XS
COD: 62140-LBC

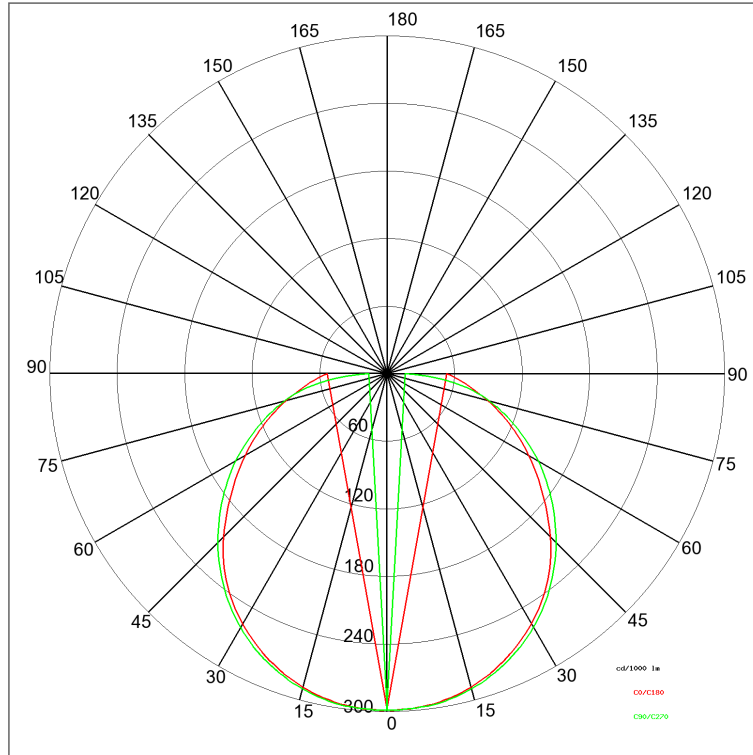

E _{max} /E _{min}		180°	
			0 m
		Area: NAN x NAN	2 m
65 / 41		Area: NAN x NAN	4 m
17 / 10		Area: NAN x NAN	6 m
8 / 5		Area: NAN x NAN	8 m
5 / 3		Area: NAN x NAN	10 m
3 / 2		Area: NAN x NAN	12 m
2 / 2		0°	
		C0-C180: 59° + 59°	C90-C270: 61° + 61°

JUPITER XS
COD: 62140-LBC

