



ANDROMEDA Q2 TECHNICAL DATA SHEET


T Y P O L O G Y :

Recessed power spotlight for indoor applications

Product code **AND.028.03 / A3411.03ZC**


F E A T U R E S O F M A T E R I A L S :

Front part	Stainless steel
Body	Anticorodal aluminium EN AW-6060
Heatsink	Anticorodal aluminium EN AW-6060
Optics	PMMA collimating lens (45°)
Parts coupling	Bicomponent epoxy resin
Clamp	Nylon granule
Printed circuit	Insulated metal substrate PCB
Power cords	50cm PVC ant flame FROR 3 poles (2x0,5mm ² + 1x0,25mm ²)
Screws	Stainless steel
Fixing springs	Stainless steel

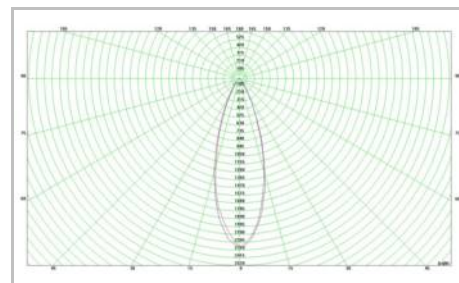

L I G H T I N G F E A T U R E S :

Color temp.	3000K
CRI	93
Radiation pattern	Lambertian
Emission angle	45°
Luminous flux *	354,47 lm

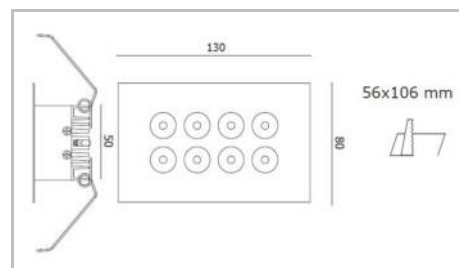

E L E C T R I C A L F E A T U R E S :

Source	8x SSC P4 Monochromatic power led 1W 3000K
Driving	24Vdc (±5%) + dimming signal (optional)
Consumption	10W
Lifetime **	50000h
Approvals	IEC598/1, 73/23/CEE, 89/336/CEE, 93/68/CEE, CEI EN 61547, CEI EN 60598-1, CEI EN 60598-2-1, CEI EN 61000-3-2
Temp. Room	-30°C ÷ +50°C
Tc (Metal Body)	<90°C



M E C H A N I C A L F E A T U R E S :

Mounting system	Recessed into ceiling
Weight	300g
Mounting hole	-

* Nominal values @ junction temperature Tj=25°C

** Average values @ junction temperature Tj=80°C

Frontal finishing

Aluminium painted



Validation date: 25/07/2012

Data sheet n° STE.8825 Ver. 3.1

Via Europa, 12 - 20863 Concorezzo - Monza e Brianza - Italy - Tel +39.039.6908061/62/69 - Fax +39.039.6908659/666
www.aldabra.it - aldabra@aldabra.it - Registro nazionale "R.A.E.E." n°IT0802000000940

The present technical data sheet and all the information contained are property of Aldabra S.r.l. All rights reserved.
Aldabra S.r.l. reserve the right to change specifications without notice