

OUTSIDE Round recessed CIELO


CIELO C LED COD: E8141C-RGB-30

Use: outside, led Installation: Ceiling recessed Recessed hole: Recessed hole diam.70 mm. Recessed thickness 1-20 mm. Fixing system: Steel spring Body/structure: Die-cast aluminium body and thermoplastic frame/ring Coating: Epoxy powder coating with special treatment for outdoor use Colour: Black Optic/reflector: Metacrylate LED lens Equipment: Supply cable WRN 2x0,5mmq - L = 250 mmGlass/diffuser: Clear tempered glass Cable gland: Nichel plated brass cable gland PG7 Control gear: Not included; to be ordered separately

Current: Beam angle: Insulation class: Weight: IP rating: Glow wire: Lamp included: Kind of led: Lamp wattage: Colour temperature: 350mA - 550mA dc Simmetric flood beam 30 Degrees Insulation class 3 0,350 kg 65 [850 °C] Yes Power LED 3.6 W Regolata Red 48.7Lm, Green 90.6Lm, Blue 33Lm.

Review board:

23-05-2012

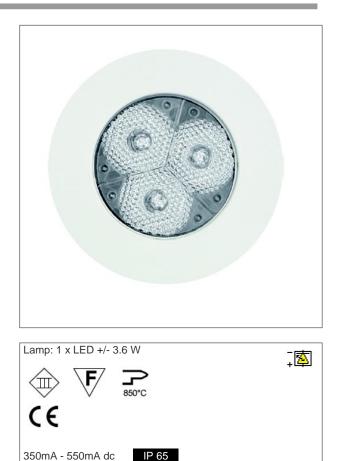

A DestraA





CIELO C LED COD: E8141C-RGB-30



148. Cassaforma per solette

