



Indoor

526

PIL66 IP66 T5 FH



Technical data

IDEALLUX
Every time italian light

526

PIL66 IP66 T5 FH




Body:	Polycarbonate self-extinguishing grey colour.	Weight:	to 1.00 at 2.70 Kg
Diffuser:	Polycarbonate trasparent self-extinguishing .	Wiring:	CAE(High frequency electronic ballast) DIM (dimmable) DALI (DALI).
Gear Tray (reflector):	White powder coated steel sheet fixed to the body, retaining clips with electrical components.	Lamps:	T5 (linear fluourescent tube)
IP Rate:	IP66.	Gasket:	Polyuretane.
Lampholder:	G5.	Back of housing:	Easy to install accessories in stainless steel
Cablegland:	PG13 in nylon.	Holding hooks:	Polycarbonate steel suspension brakets and hooks.
		On request:	Kit Emergency Stainless steel clips.


Code	Description	Weight	grey
526/43/*	PIL66 IP66 T5 FH 1x14w	1.00 Kg	
526/47/*	PIL66 IP66 T5 FH 1x28w	1.80 Kg	
526/49/*	PIL66 IP66 T5 FH 1x35w	2.30 Kg	
526/52/*	PIL66 IP66 T5 FH 2X14w	1.70 Kg	
526/56/*	PIL66 IP66 T5 FH 2x28w	2.70 Kg	
526/58/*	PIL66 IP66 T5 FH 2x35w	2.70 Kg	



Drawing

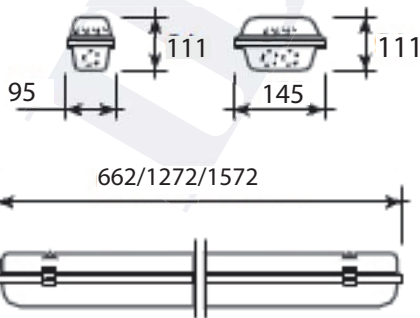

Photometric curve



Maintenance



Ideallux s.r.l.
Via G. Casighino 11
27024 Cilavegna (PV)
Tel +39 0381 969814
Fax +39 0381 96484
info@ideallux.it
www.ideallux.it

IDEALLUX
Every time italian light