




Balizas de exterior / Bollards



Gyros

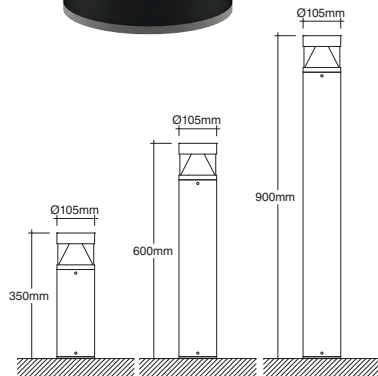

BALIZAS DE EXTERIOR LED IP 65

IP 65 LED OUTDOOR BOLLARDS

	Flujo luz Light output	Consumo Consumption	Temperatura color disponible °K Available color temperature °K	CRI Disponibles Available CRI
GYR 11	845 lm	11W	3.000/4.000°K	CRI> 80

Con driver electrónico 350 mA incluido.
Cuerpo de aluminio anodizado y difusor de PMMA.
Disponibles en altura de 350 mm, 600 mm y 900 mm (otras alturas consultar).

*With electronic control driver built in.
Main body made with anodized aluminium,
PMMA transparent diffuser.
Length available 350 mm, 600 mm and 900 mm (ask for another lengths).*

COMPOSICIÓN DE REFERENCIAS / REFERENCE PLANNING

.30	3000°K	CRI>80	.35	altura/length 350 mm
.40	4000°K	CRI>80	.60	altura/length 600 mm
			.90	altura/length 900 mm

EJEMPLO DE REFERENCIA / REFERENCE EXAMPLE:

GYR 11.40.60 AN: 845lm 11w 4000°K 600 mm
Altura negro / Length black

ACABADOS / FINISHES



DIRECCION LUZ / LIGHT DIRECTION



TIPO / KIND

