

APPLY1 LED COD: E8050-LBC

Use:

outside, led

Installation:

Wall mounted

Body/structure:

Die-cast aluminium body

Epoxy powder coating with special treatment for outdoor use

Colour: Black

Equipment: Silicon rubber gaskets

Glass/diffuser: Frosted tempered glass

Cable gland:

Silicon rubber cable gland

Control gear: Integrated LED ballast 24Vdc output

220-240V 50/60Hz Voltage:


Beam angle: Symmetric, mono directional

Insulation class: Insulation class 1


Weight: 1,580 kg IP rating: [850 °C] Glow wire: Lamp included: Yes Lamp wattage: 4 W Lamp luminous flux: 430 lm 3000K Colour temperature: CRI:

Review board: 19-05-2014















APPLY1 LED COD: E8050-LBC



P30 PALO DA INTERRARE





P30P PALO DA PAVIMENTO





APPLY1 LED COD: E8050-LBC

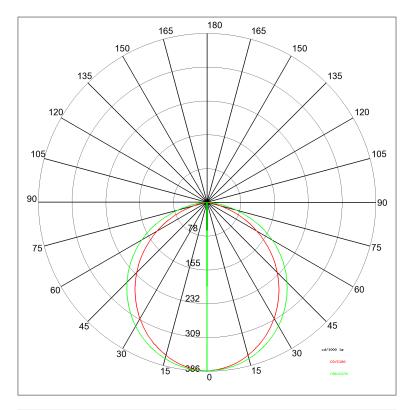

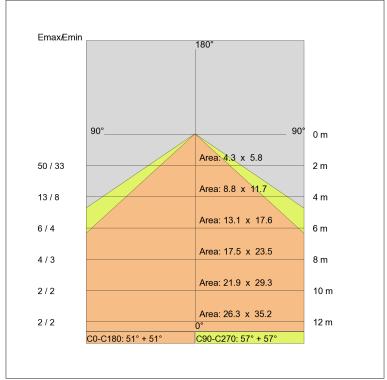





APPLY1 LED COD: E8050-LBC

