


CERKIO XS
COD: E5443-EM-SE

Use:
outside
Installation:
Wall/Ceiling mounted
Body/structure:
Die-cast aluminium body
Coating:
Epoxy powder coating with special treatment for outdoor use
Colour:
White
Equipment:
Silicon rubber gaskets
Glass/diffuser:
Polycarbonate opal diffuser
Cable gland:
Silicon rubber cable gland PG11
Control gear:
Inverter and battery pack
Emergency unit:
[Funzionamento solo in emergenza con flusso luminoso 20%; autonomia 1 ora.]

Voltage: 220-240V 50/60Hz
Beam angle: Simmetric flood beam
Insulation class: Insulation class 1
Weight: 1,200 kg
IP rating: 65
Glow wire: [850 °C]
IK rating: 10


Review board: 24-10-2012

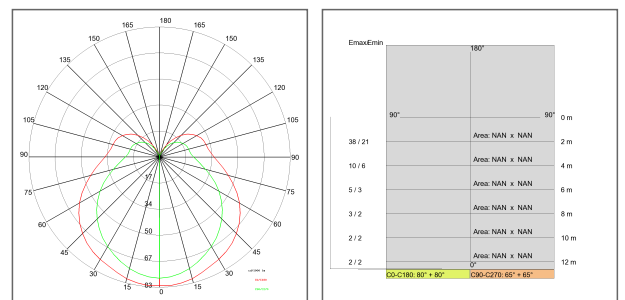


Lamp: 1 x FSMH GX24q 26.00 W



IK 10 IP 65 A

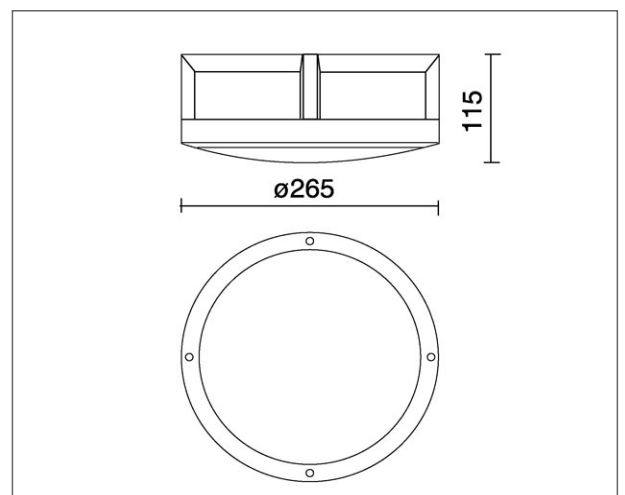

CERKIO XS
COD: E5443-EM-SE

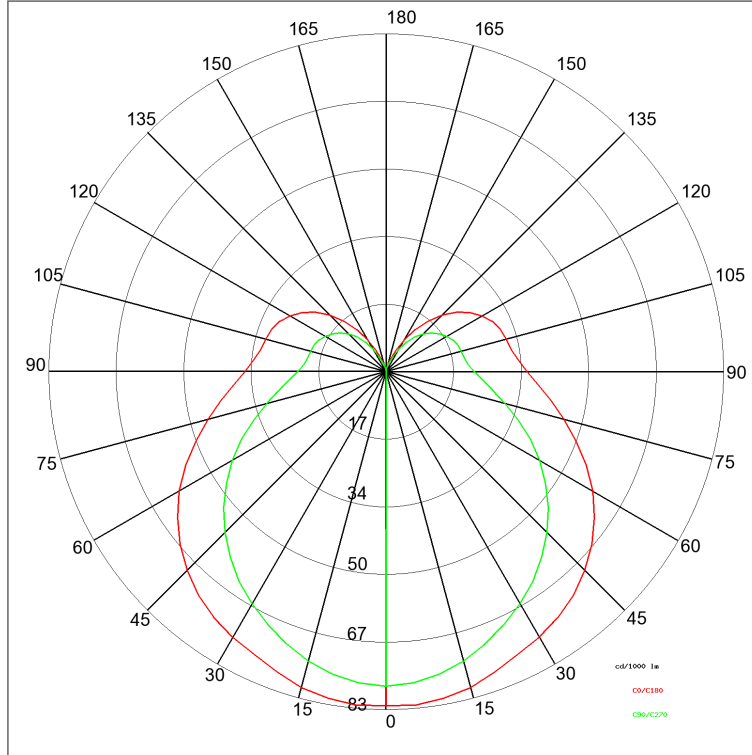

Emax/Emin		180°	
			0 m
	90°		90°
		Area: NAN x NAN	2 m
38 / 21		Area: NAN x NAN	4 m
10 / 6		Area: NAN x NAN	6 m
5 / 3		Area: NAN x NAN	8 m
3 / 2		Area: NAN x NAN	10 m
2 / 2		Area: NAN x NAN	12 m
2 / 2		0°	
		C0-C180: 80° + 80°	C90-C270: 65° + 65°

CERKIO XS
COD: E5443-EM-SE

