

REEF
COD: E1004

Use:
outside

Installation:
Ground/Wall/Ceiling fixing

Fixing system:
Adjustable brackets

Body/structure:
Die-cast aluminium body

Coating:
Epoxy powder coating with special treatment for outdoor use

Colour:
Black

Optic/reflector:
Pure aluminium reflector

Equipment:
Supply cable L = 2 mt.

Glass/diffuser:
Clear tempered glass

Cable gland:
Nichel plated brass cable gland PG13,5

Control gear:
Integrated electronic ballast

Voltage: 220-240V 50/60Hz

Beam angle: Simmetric flood beam 30 degrees

High power factor: Yes



Insulation class: Insulation class 1

Weight: 3,400 kg

IP grade: 66

Glow wire: [850 °C]

Revisione scheda*: 11-01-2011

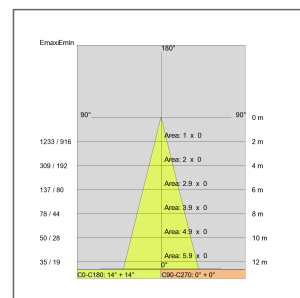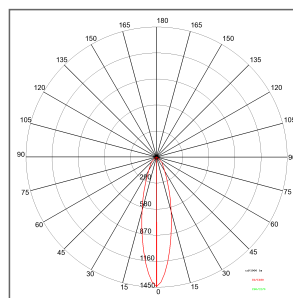


Lamp: 1 x MT G12 35.00 W




220-240V 50/60Hz


IP 66

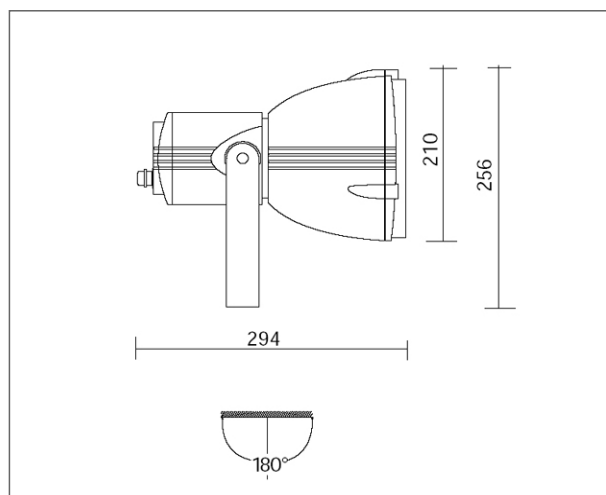


REEF
COD: E1004

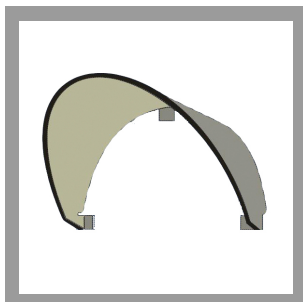

E1020
PALPEBRA n

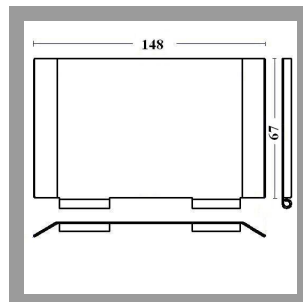

E1025
ALETTA n

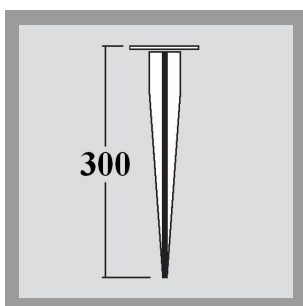

E1030
PICCHETTO

REEF
COD: E1004

